



EMC REPORT

Product Type: Copper Wire Granulating Machine

Test Model: 200mini

Model No.: 200mini,T200,T260,T280,T360,T400,T400-1,T400-2,T600

Trademark: /

Applicant: Senduo Recycle Machinery CO.,LTD.
Building 3,Huifeng Technology Industrial Zone,Fengjiang Street,
Luqiao Town,Taizhou City,Zhejiang,China

Manufacturer: Senduo Recycle Machinery CO.,LTD.
Building 3,Huifeng Technology Industrial Zone,Fengjiang Street,
Luqiao Town,Taizhou City,Zhejiang,China

Factory: Senduo Recycle Machinery CO.,LTD.
Building 3,Huifeng Technology Industrial Zone,Fengjiang Street,
Luqiao Town,Taizhou City,Zhejiang,China

Report Number: OVIS202503046E

Testing Standard: EN IEC 61000-6-4:2019,EN IEC 61000-6-2:2019

Date of Test: Mar. 08, 2025 to Mar. 21, 2025

Date of Report: Mar. 22, 2025

Test Result: Positive Negative





Revision Record			
Version	Description	Date	Remark
Ver.0.0	Original	Mar. 22, 2025	/

Authorized for issue by:

Prepared by

Caroline Chen

(Caroline Chen)

Reviewer by

Sam Jin

(Sam Jin)

Approved by

Cici Chen

(Cici Chen)





2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	EN IEC 61000-6-4:2019	CISPR 16-2-1	N/A	Pass
Radiated Emissions (30MHz-1GHz)	EN IEC 61000-6-2:2019	CISPR 16-2-3	N/A	Pass

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN IEC 61000-6-2:2019	EN 61000-4-2:2009	4kV Contact Discharge 8kV Air Discharge	Pass
Electrical Fast Transients/Burst at Power Port		EN 61000-4-4:2012	2kV 5/50ns Tr/Td 5 or 100kHz Repetition Frequency	Pass
Surge at Power Port		EN 61000-4-5:2014 +A1:2017	1.2/50µs Tr/Td 1kV Line to Line 2kV Line to Ground	Pass
Conducted Immunity at Power Port (150kHz-80MHz)		EN 61000-4-6:2014	10Vrms (emf),80%,1kHz Amp. Mod.	Pass
Voltage Dips and Interruptions		EN 61000-4-11:2004 +A1:2017	0 % UT for 1per 40 % UT for 10per 70 % UT for 25per 0 % UT for 250per UT is Supply Voltage	Pass
Radiated Immunity (80MHz-3.6GHz)		EN 61000-4-3:2006 +A1:2008+A2:2010	10V/m, 80%, 1kHz Amp. Mod. 3V/m, 80%, 1kHz Amp. Mod.	Pass

Declaration of EUT Family Grouping:

Note: There are series models mentioned in this report, and they are the similar in electrical and electronic characters. Only the model 200mini was tested since their differences were the model number and appearance.





3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	4
4.1 DETAILS OF E.U.T	4
4.2 DESCRIPTION OF SUPPORT UNITS	4
4.3 MEASUREMENT UNCERTAINTY	4
4.4 TEST LOCATION	4
4.5 DEVIATION FROM STANDARDS	4
4.6 ABNORMALITIES FROM STANDARD CONDITIONS	4
4.7 MONITORING OF EUT FOR ALL IMMUNITY TEST	4
5 EQUIPMENT LIST	5
6 EMISSION TEST RESULTS	8
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MH8z)	8
6.2 RADIATED EMISSIONS (30MHz-1GHz)	11
7 IMMUNITY TEST RESULTS	14
7.1 PERFORMANCE CRITERIA DESCRIPTION IN EN IEC 61000-6-2:2019	14
7.2 ELECTROSTATIC DISCHARGE	15
7.3 ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT	16
7.4 SURGE AT POWER PORT	17
7.5 CONDUCTED IMMUNITY AT POWER PORT (150KHz-80MHz)	19
7.6 VOLTAGE DIPS AND INTERRUPTIONS	20
7.7 RADIATED IMMUNITY (80MHz-3.6GHz)	21
8 PHOTOGRAPHS	22
8.1 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	22





4 General Information

4.1 Details of E.U.T.
Power supply: AC230V/50Hz
Test voltage: AC230V/50Hz

4.2 Description of Support Units
The EUT has been tested as an independent unit

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Emission at mains port using AMN	2.6dB (9kHz to 150kHz) 2.4dB (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	1.8 dB (9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	4.2 dB (150kHz to 30MHz)
4	Radiated Power	2.3dB
5	Radiated Emission	4.5dB (30MHz-1GHz) 5.1dB (1GHz-3.6GHz)
6	Radiated Disturbance (disturbance current in a LLAS)	2.4dB (9kHz to 30MHz)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.4 Test Location
All tests were performed at:
OVIS Testing Technology (Zhejiang) Co., Ltd.
Building 31, Feiyue Park, Xiachen Street, Jiaojiang District, Taizhou City, Zhejiang Province, China
Tel: 400-8008-959

4.5 Deviation from Standards
None

4.6 Abnormalities from Standard Conditions
None

4.7 Monitoring of EUT for All Immunity Test
Visual: Monitor the work status

5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date Cal	Due Date
EMI test receiver	Rohde&Schwarz	ESR3	OVIS-YQ125	2024-10-07	2025-10-06
Artificial mains network	AFJ	LT32C	OVIS-YQ126	2024-10-07	2025-10-06
Shielding Room	Everfine	SR-500	OVIS-YQ127	2024-10-07	2025-10-06

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date Cal	Due Date
EMI test receiver	Rohde&Schwarz	ESR3	OVIS-YQ125	2024-10-07	2025-10-06
CONTROLLER	Noyetec	XTJC	OVIS-YQ128	2024-10-07	2025-10-06
ANTENNA MAST	SCHWARZBECK	VULB9163	OVIS-YQ129	2024-10-07	2025-10-06
Semi/Fully Anechoic	Noyetec	SR-500	OVIS-YQ130	2024-10-07	2025-10-06
Pre-Amplifier	Noyetec	NYPA0930	OVIS-YQ131	2024-10-07	2025-10-06

Electrostatic Discharge Test Setup					
Equipment	Manufacturer	Model No	Inventory No	Cal Date Cal	Due Date
ESD generator	Everfine	EMS61000-2A	OVIS-YQ132	2024-10-07	2025-10-06

Electrical Fast Transients/Burst at Power Port					
Equipment	Manufacturer	Model No	Inventory No	Cal Date Cal	Due Date
Burst generator	Everfine	EMS61000-4A	OVIS-YQ133	2024-10-07	2025-10-06
Coupling clamp	Everfine	EFTC-2	OVIS-YQ134	2024-10-07	2025-10-06


Surge at Power Port					
Equipment	Manufacturer	Model No	Inventory No	Cal Date Cal	Due Date
Lightning surge generator	Everfine	EMS61000-5A	OVIS-YQ135	2024-10-07	2025-10-06


Conducted Immunity at Power Port (150kHz-80MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date Cal	Due Date
Signal generator	Rigol	DSG821	OVIS-YQ136	2024-10-07	2025-10-06
Power Amplifier	Noyetec	NYPA 0123-100	OVIS-YQ137	2024-10-07	2025-10-06
6dB Attenuator	Noyetec	ATT01	OVIS-YQ138	2024-10-07	2025-10-06
Coupling and Decoupling Network (CDN)	SCHWARZBECK	CDN M2/M3	OVIS-YQ139	2024-10-07	2025-10-06
RF Generator	Noyetec	SR100-6W	OVIS-YQ140	2024-10-07	2025-10-06
Shielding Room	Everfine	SR-500	OVIS-YQ127	2024-10-07	2025-10-06
Coupling and Decoupling Network (CDN)	SCHWARZBECK	CDN M4PE	OVIS-YQ141	2024-10-07	2025-10-06

Voltage Dips and Interruptions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date Cal	Due Date
Three-phase cycle drop generator	Everfine	EMS61000-11 CA	OVIS-YQ142	2024-10-07	2025-10-06
Coupling and Decoupling Network (CDN)	Everfine	CDNI-3A	OVIS-YQ143	2024-10-07	2025-10-06
Manual step transformer	Everfine	SG-15KVA	OVIS-YQ144	2024-10-07	2025-10-06

Radiated Immunity (80MHz-3.6GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date Cal	Due Date
Signal generator	Rigol	DSG836	OVIS-YQ145	2024-10-07	2025-10-06
Antenna	SCHWARZBECK	VUSLP9111E	OVIS-YQ146	2024-10-07	2025-10-06
Amplifier	Noyetec	NYPA0810-200	OVIS-YQ147	2024-10-07	2025-10-06
Power meter sensor	PMM	EP601	OVIS-YQ148	2024-10-07	2025-10-06
ElectroMagnetic Field Probe	Ceyear	87230	OVIS-YQ149	2024-10-07	2025-10-06
Shielding Room	Everfine	SR-500	OVIS-YQ127	2024-10-07	2025-10-06

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date Cal	Due Date
Digital pressure meter	YIOU	DPH-103	OVIS-YQ073	2024-10-07	2025-10-06
Temperature&humidity recorder	Dongguan Jinghe Electronic Technology Co., Ltd	MC501	OVIS-YQ095	2024-10-07	2025-10-06
Digital Multimeter	Fluke	319	OVIS-YQ012	2024-10-07	2025-10-06

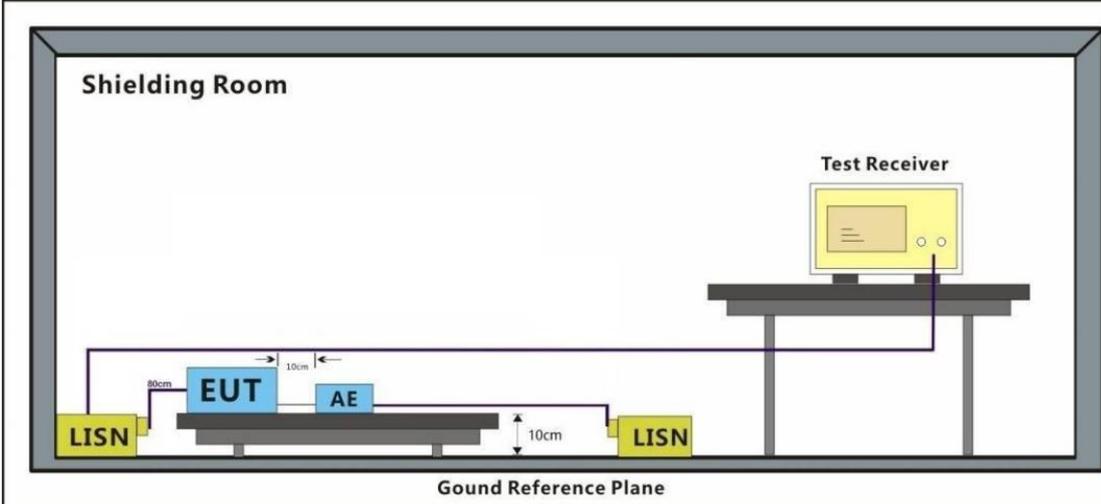
6	Emission Test Results
6.1	Conducted Emissions at Mains Terminals (150kHz-30MHz)
	Test Requirement: EN IEC 61000-6-4:2019
	Test Method: CISPR 16-2-1
	Frequency Range: 150kHz to 30MHz
	Limit: 0.15M-0.5MHz 79dB(μV) quasi-peak, 66dB(μV) average 0.5M-30MHz 73dB(μV) quasi-peak, 60dB(μV) average Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz
6.1.1	E.U.T. Operation
	Operating Environment:
	Temperature: 22°C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual .
6.1.2	Test Setup Diagram
	 <p>The diagram illustrates the test setup within a Shielding Room. A Ground Reference Plane is shown at the bottom. On the left, a LISN (Line Impedance Stabilization Network) is connected to the EUT (Equipment Under Test). The EUT is connected to an AE (Antenna) which is positioned 10cm away from the EUT. The AE is also connected to another LISN. On the right, a Test Receiver is connected to the second LISN. The Test Receiver is placed on a table, and the distance between the AE and the Test Receiver is 10cm. The entire setup is enclosed in a Shielding Room.</p>
6.1.3	Measurement Data
	An initial pre-scan was performed with peak detector.Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected

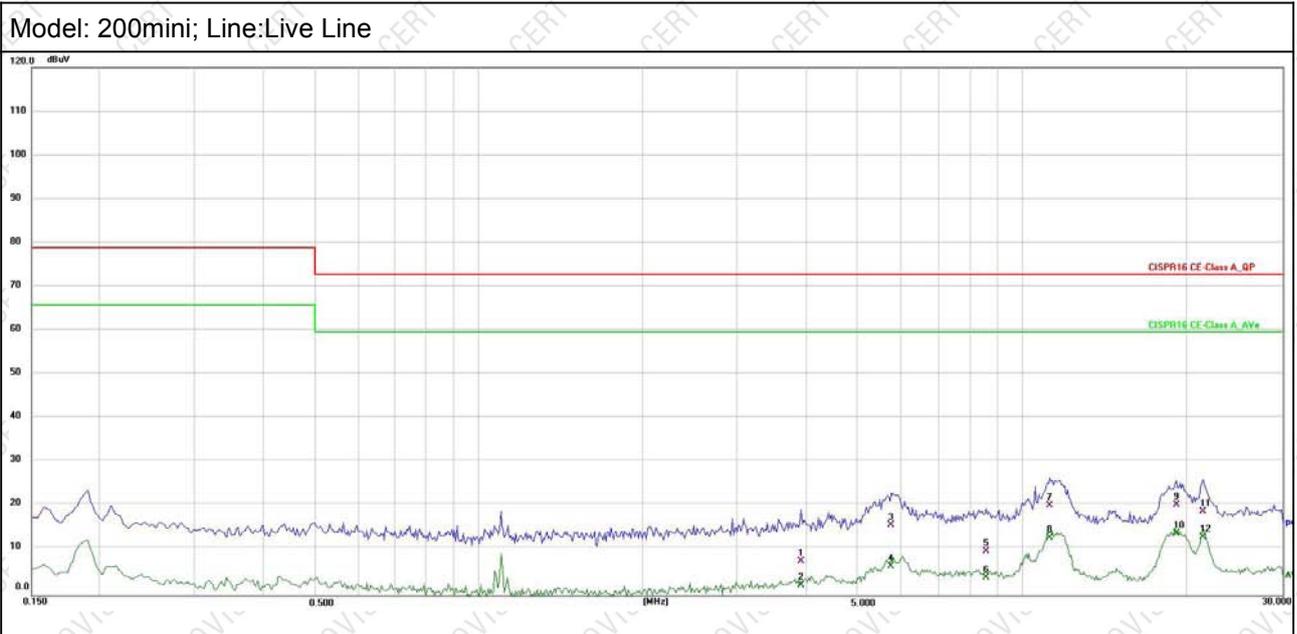



No.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Measure-Ment (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	3.9180	-3.11	11.09	7.98	73.00	-65.02	QP
2	3.9180	-8.61	11.09	2.48	60.00	-57.52	AVG
3	5.7140	4.97	11.14	16.11	73.00	-56.89	QP
4	5.7140	-4.34	11.14	6.80	60.00	-53.20	AVG
5	8.5540	-1.15	11.28	10.13	73.00	-62.87	QP
6	8.5540	-7.08	11.28	4.20	60.00	-55.80	AVG
7	11.2260	9.18	11.38	20.56	73.00	-52.44	QP
8	11.2260	1.78	11.38	13.16	60.00	-46.84	AVG
9	19.1820	8.91	11.79	20.70	73.00	-52.30	QP
10	19.1820	2.41	11.79	14.20	60.00	-45.80	AVG
11	21.4540	7.18	12.04	19.22	73.00	-53.78	QP
12	21.4540	1.35	12.04	13.39	60.00	-46.61	AVG


Notes:Measure-Ment=Reading Level+Factor

This Test Report is issued by the Company subject to its Conditions of issuance of Test Reports printed overleaf and is intended for your exclusive use. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. This test report includes all of the tests requested by you and the results there of based upon the information that you provided. You have 30 days from date of issuance of this test report to notify us of any error or omission caused by our negligence. Provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

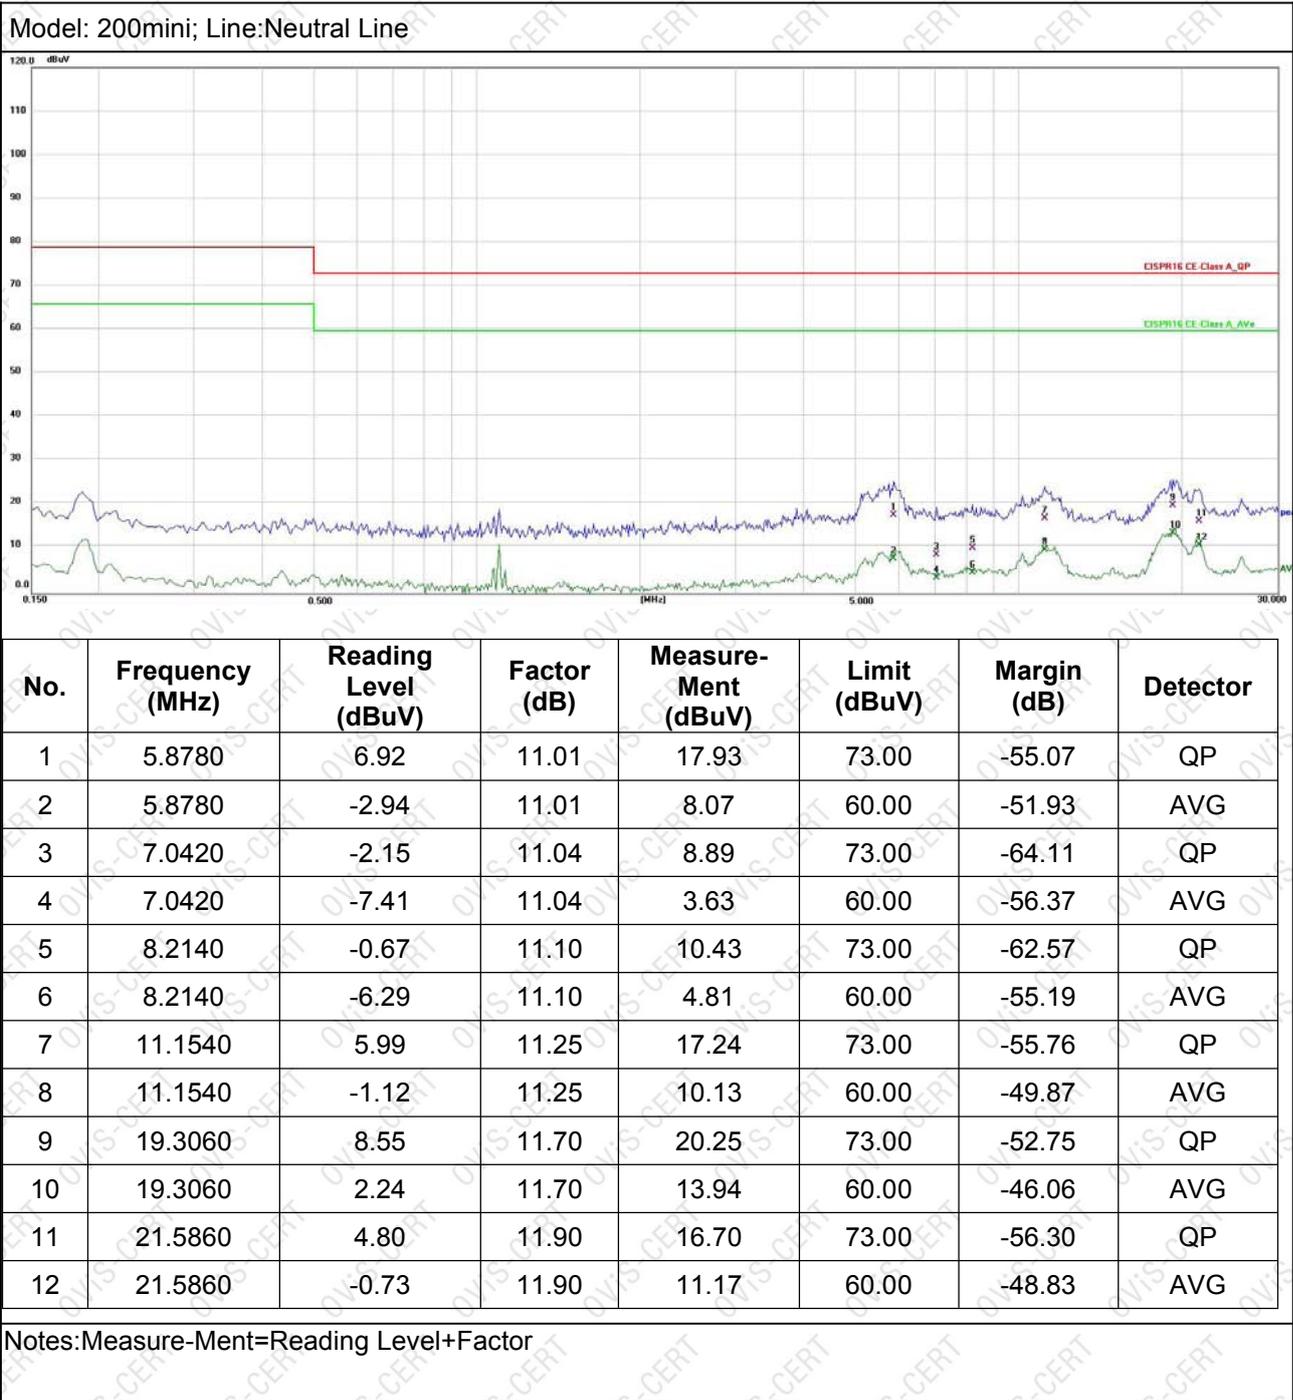


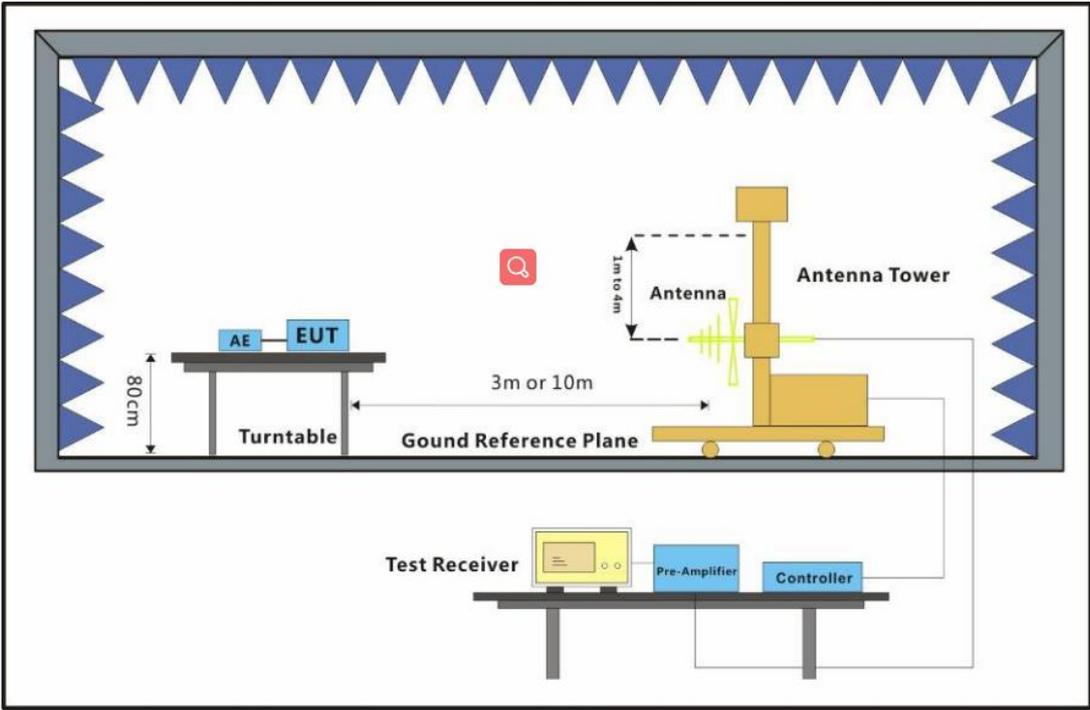6.2	Radiated Emissions (30MHz-1GHz)
	Test Requirement: EN IEC 61000-6-4:2019
	Test Method: CISPR 16-2-3
	Frequency Range: 30MHz to 1GHz
	Measurement Distance: 3m
	Limit: 30MHz-230MHz 50 dB(μV/m) quasi-peak 230MHz-1GHz 57 dB(μV/m) quasi-peak Detector: Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz
6.2.1	E.U.T. Operation
	Operating Environment:
	Temperature: 22°C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test model 200mini:Normal Working_keep EUT running continual .
6.2.2	Test Setup Diagram
	 <p>The diagram illustrates the test setup within an electromagnetic chamber. On the left, a Turntable is positioned at a height of 80 cm, supporting an Antenna Element (AE) and the Equipment Under Test (EUT). To the right, an Antenna Tower is mounted on a Gound Reference Plane, with the antenna element positioned 1m to 4m above the plane. The measurement distance between the EUT and the antenna is indicated as 3m or 10m. Below the chamber, a Test Receiver system is shown, consisting of a Test Receiver, a Pre-Amplifier, and a Controller, all connected to the antenna tower.</p>
6.2.3	Measurement Data
	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities

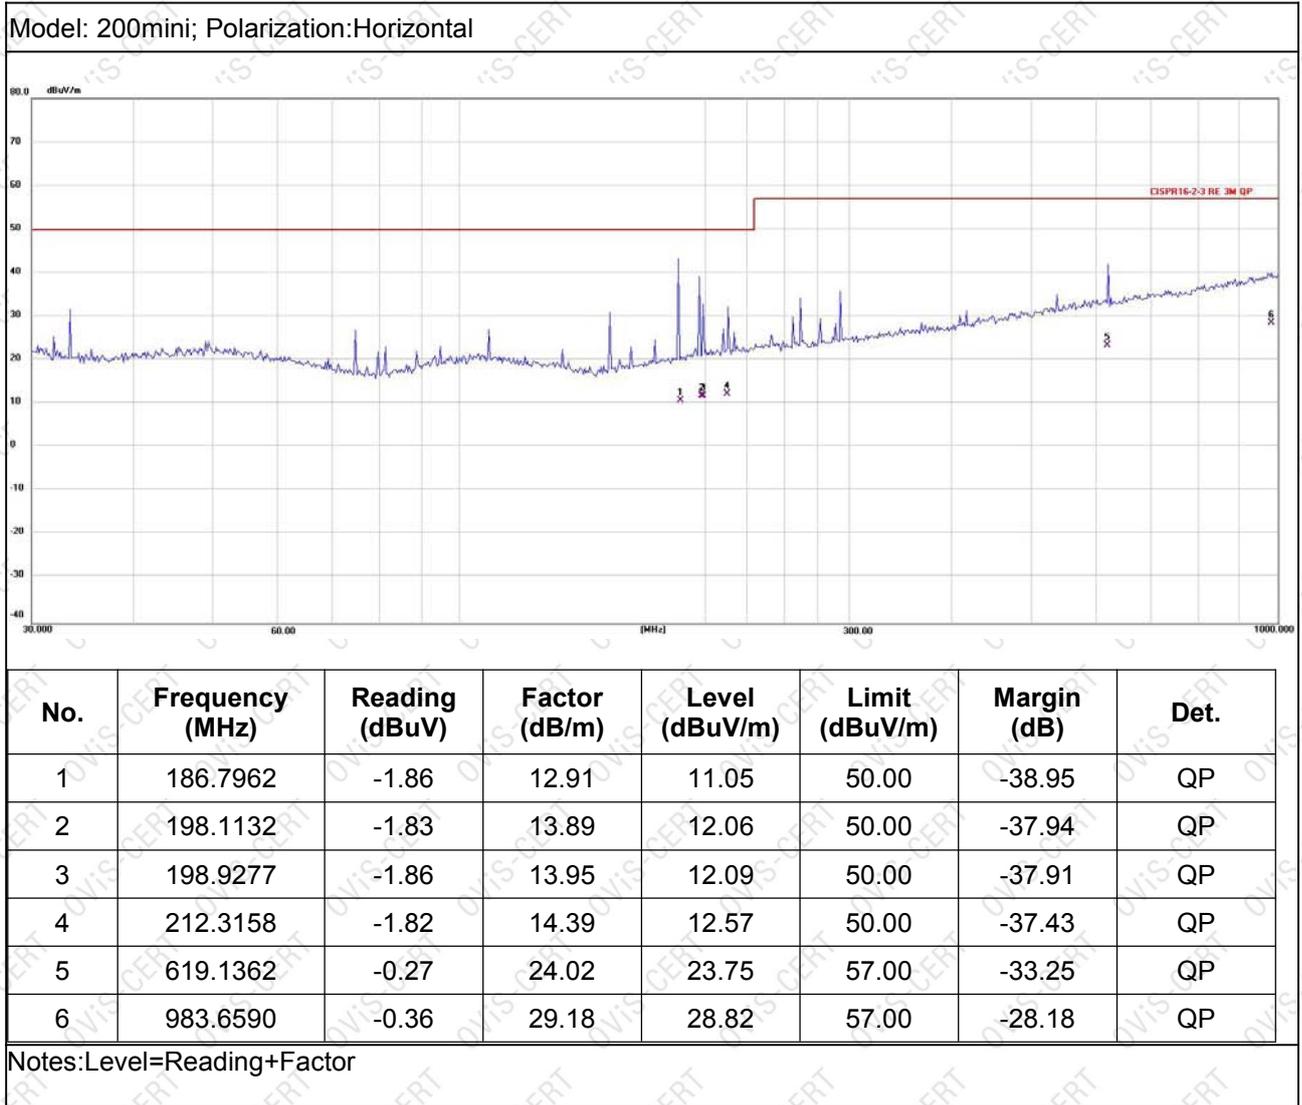

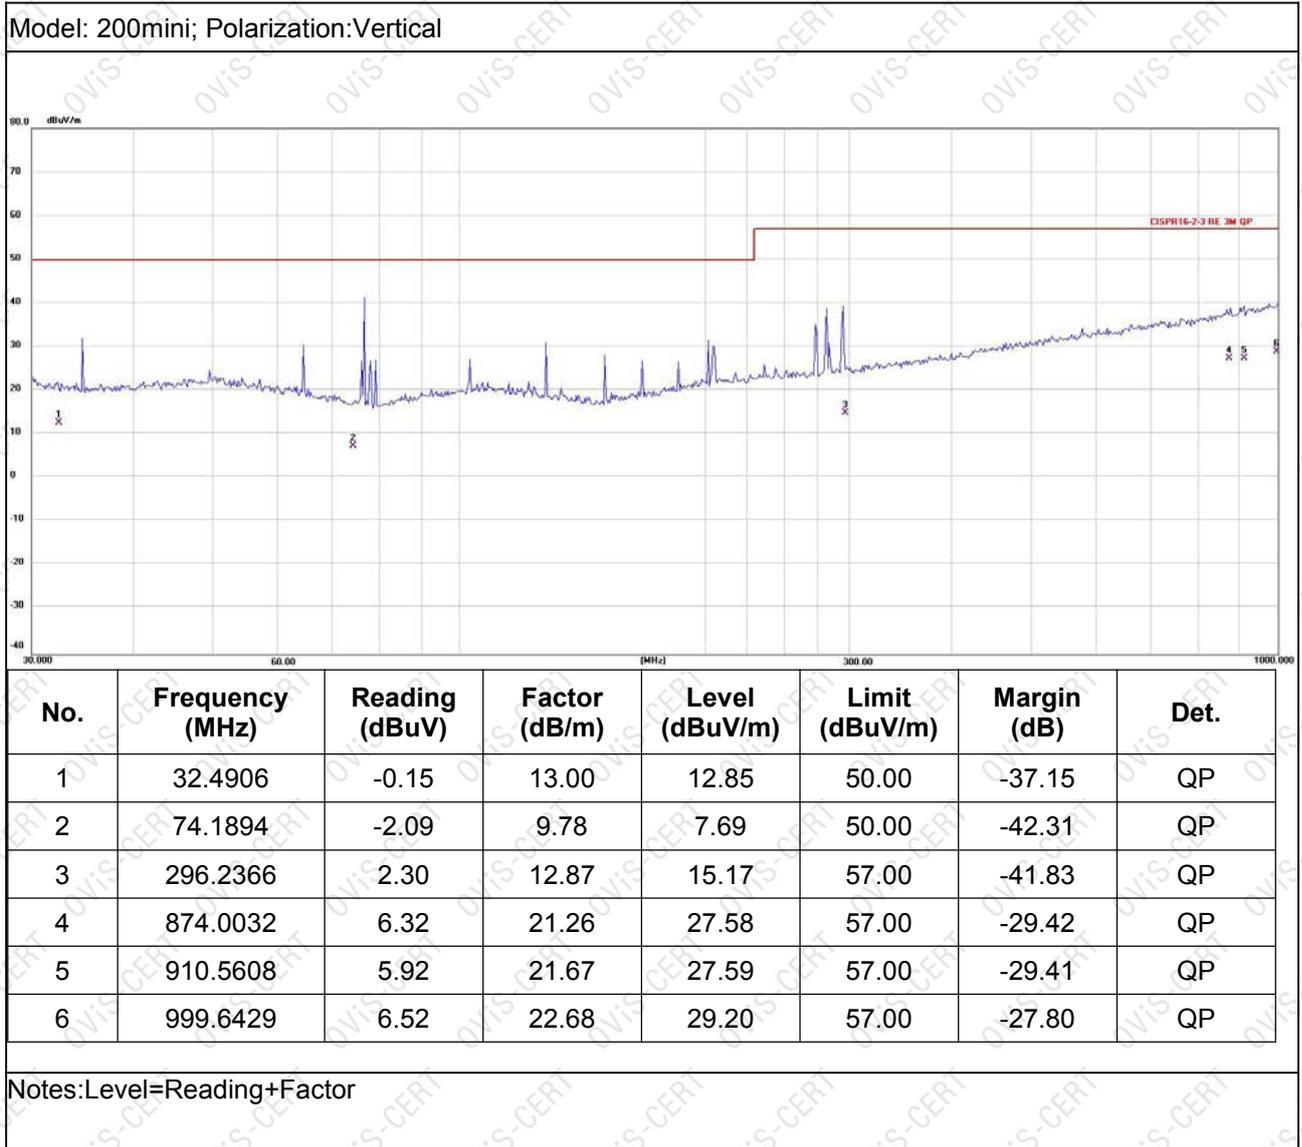

7	Immunity Test Results	
7.1	Performance Criteria Description in EN IEC 61000-6-2:2019	
	Criterion A	The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
	Criterion B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
	Criterion C	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

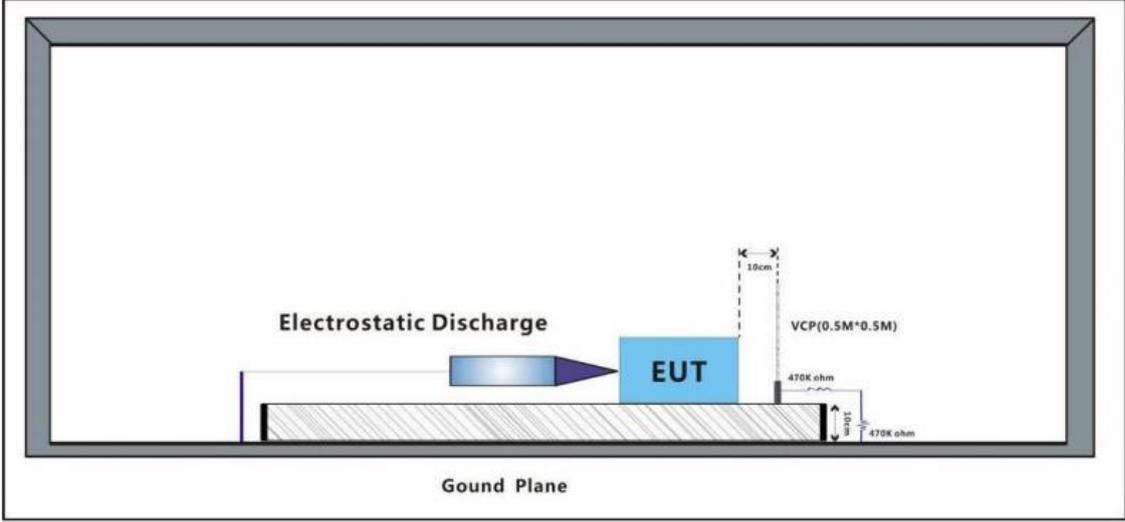
7.2	Electrostatic Discharge															
	Test Requirement: EN IEC 61000-6-2:2019															
	Test Method: EN 61000-4-2:2009															
	Performance Criterion: B															
	Discharge Impedance: 330Ω/150pF															
	Number of Discharge: Minimum 10 times at each test point															
	Discharge Mode: Single Discharge															
	Discharge Period: 1 second minimum															
7.2.1	Test Setup Diagram															
																
7.2.2	E.U.T. Operation															
	Operating Environment:															
	Temperature: 22°C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar															
	Test mode:Normal Working_keep EUT running continual .															
7.2.3	Test Results:															
	Observations: Test Point:															
	1. All insulated enclosure and seams.															
	2. All accessible metal parts of the enclosure.															
	3. All side															
	<table border="1"> <thead> <tr> <th>Discharge type</th> <th>Level (kV)</th> <th>Polarity</th> <th>Test Point</th> <th>Result / Observations</th> </tr> </thead> <tbody> <tr> <td>Air Discharge</td> <td>2,4,8</td> <td>+,-</td> <td>1,3</td> <td>A</td> </tr> <tr> <td>Contact discharge</td> <td>2,4,8</td> <td>+,-</td> <td>2</td> <td>A</td> </tr> </tbody> </table>	Discharge type	Level (kV)	Polarity	Test Point	Result / Observations	Air Discharge	2,4,8	+,-	1,3	A	Contact discharge	2,4,8	+,-	2	A
Discharge type	Level (kV)	Polarity	Test Point	Result / Observations												
Air Discharge	2,4,8	+,-	1,3	A												
Contact discharge	2,4,8	+,-	2	A												
	Results:															
	A: No degradation in the performance of the EUT was observed.															

7.3	Electrical Fast Transients/Burst at Power Port
-----	--

This Test Report is issued by the Company subject to its Conditions of issuance of Test Reports printed overleaf and is intended for your exclusive use. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. This test report includes all of the tests requested by you and the results thereof based upon the information that you provided. You have 30 days from date of issuance of this test report to notify us of any error or omission caused by our negligence. Provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

	Test Requirement: EN IEC 61000-6-2:2019
	Test Method: EN 61000-4-4:2012
	Performance Criterion: B
	Repetition Frequency: 5kHz
	Burst Period: 300ms
	Test Duration: 2 minute per level & polarity

7.3.1 Test Setup Diagram

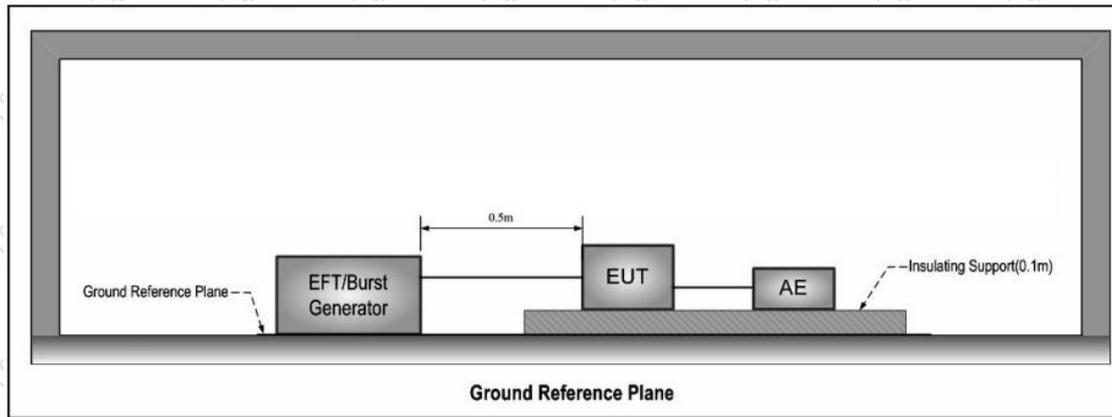

7.3.2 E.U.T. Operation

	Operating Environment:
	Temperature: 22°C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual ..

7.3.3 Test Results:


Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	2	+	CDN	A
AC power port	2	-	CDN	A

Results:
A: No degradation in the performance of the EUT was observed.

7.4 Surge at Power Port

	Test Requirement: EN IEC 61000-6-2:2019
	Test Method: EN 61000-4-5:2014 +A1:2017
	Performance Criterion: B
	Interval: 60s between each surge
	Test level:±2 kV(AC power ports, line-to-earth); ±1 kV (AC power ports, line-to-line)
	No. of surges: 5 positive, 5 negative at 0° , 90° ,180° , 270°

7.4.1 Test Setup Diagram

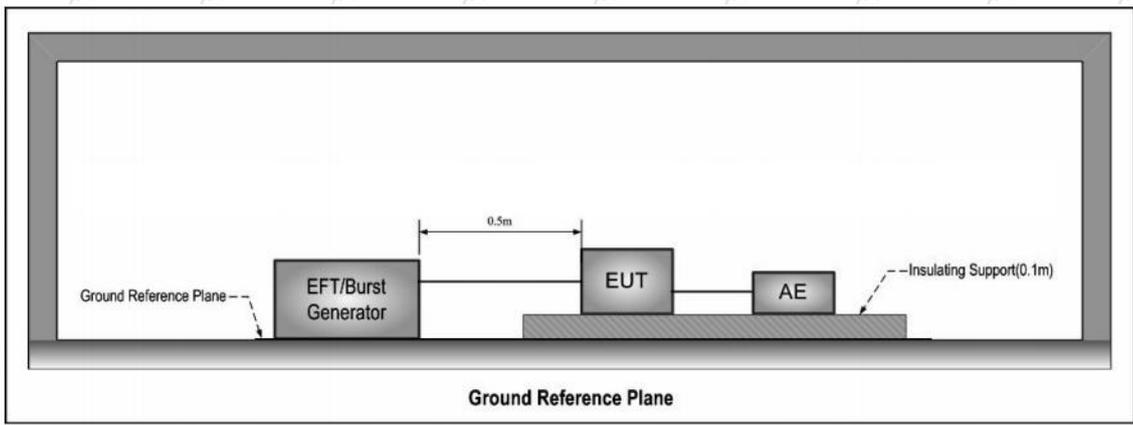

7.4.2 E.U.T. Operation

	Operating Environment:
	Temperature: 22°C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual .

7.4.3 Test Results:

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	1	+	0°	A
L-N	1	-	0°	A
L-N	1	+	90°	A
L-N	1	-	90°	A
L-N	1	+	180°	A
L-N	1	-	180°	A
L-N	1	+	270°	A
L-N	1	-	270°	A
L-PE	2	+	0°	A
L-PE	2	-	0°	A
L-PE	2	+	90°	A
L-PE	2	-	90°	A
L-PE	2	+	180°	A
L-PE	2	-	180°	A
L-PE	2	+	270°	A
L-PE	2	-	270°	A

This Test Report is issued by the Company subject to its Conditions of issuance of Test Reports printed overleaf and is intended for your exclusive use. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. This test report includes all of the tests requested by you and the results there of based upon the information that you provided. You have 30 days from date of issuance of this test report to notify us of any error or omission caused by our negligence. Provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.


N-PE	2	+	0°	A
N-PE	2	-	0°	A
N-PE	2	+	90°	A
N-PE	2	-	90°	A
N-PE	2	+	180°	A
N-PE	2	-	180°	A
N-PE	2	+	270°	A
N-PE	2	-	270°	A

Results:

A: No degradation in the performance of the EUT was observed

7.5	Conducted Immunity at Power Port (150kHz-80MHz)
	Test Requirement: EN IEC 61000-6-2:2019
	Test Method: EN 61000-4-6:2014
	Performance Criterion: A
	Frequency Range: 0.15MHz to 80MHz
	Modulation: 80%, 1kHz Amplitude Modulation
	Step Size 1%

7.5.1 Test Setup Diagram

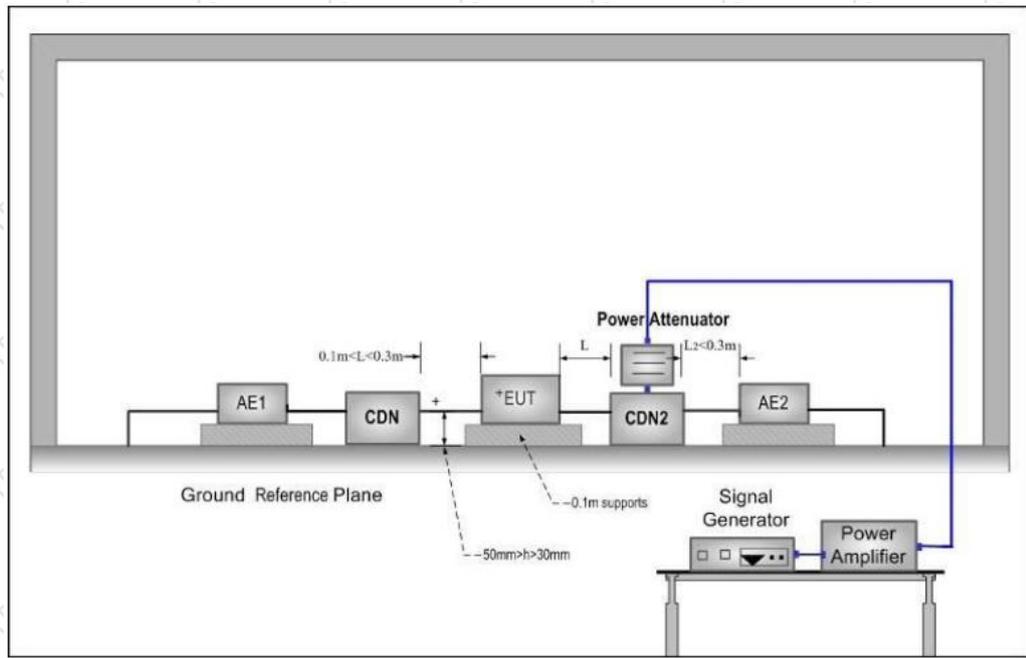


7.5.2 E.U.T. Operation

	Operating Environment:
	Temperature: 22°C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode: Normal Working_keep EUT running continual .


7.5.3 Test Results:

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	10	CDN	3s	A

Results:
A: No degradation in the performance of the EUT was observed.

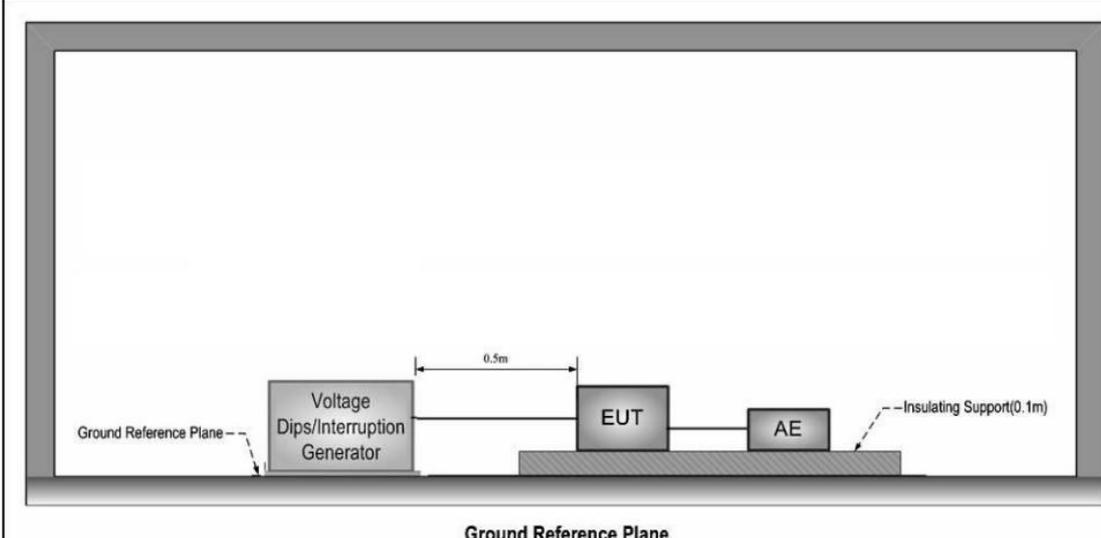7.6	Voltage Dips and Interruptions				
	Test Requirement: EN IEC 61000-6-2:2019				
	Test Method: EN 61000-4-11:2004 +A1:2017				
	Performance Criterion: 0% of UT (Supply Voltage) for 250 Periods:C; 40% of UT for 10 Periods:C; 70% of UT for 25 Periods:C; 0% of UT for 1 Periods:B;				
	No. of Dips / Interruptions: 3 per Level				
	Time between dropout 10s				
7.6.1	Test Setup Diagram				
					
7.6.2	E.U.T. Operation				
	Operating Environment:				
	Temperature: 22°C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar				
	Test mode:Normal Working_keep EUT running continual .				
7.6.3	Test Results:				
	Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
	0	0	1 Cycles	3	A
	0	180°	1 Cycles	3	A
	40	0	10 Cycles	3	A
	40	180°	10 Cycles	3	A
	70	0	25 Cycles	3	A
	70	180°	25 Cycles	3	A
	0	0	250 Cycles	3	B
	0	180°	250 Cycles	3	B
	Results:				
	A: No degradation in the performance of the EUT was observed.				
	B: During the test, EUT stop working, after the test, EUT can restart automatic.				

7.7	Radiated Immunity (80MHz-3.6GHz)
	Test Requirement: EN IEC 61000-6-2:2019
	Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010
	Performance Criterion: A
	Frequency Range: 80MHz to 1GHz
	Antenna Polarisation: Vertical and Horizontal
	Modulation: 1kHz,80% Amp. Mod,1% increment

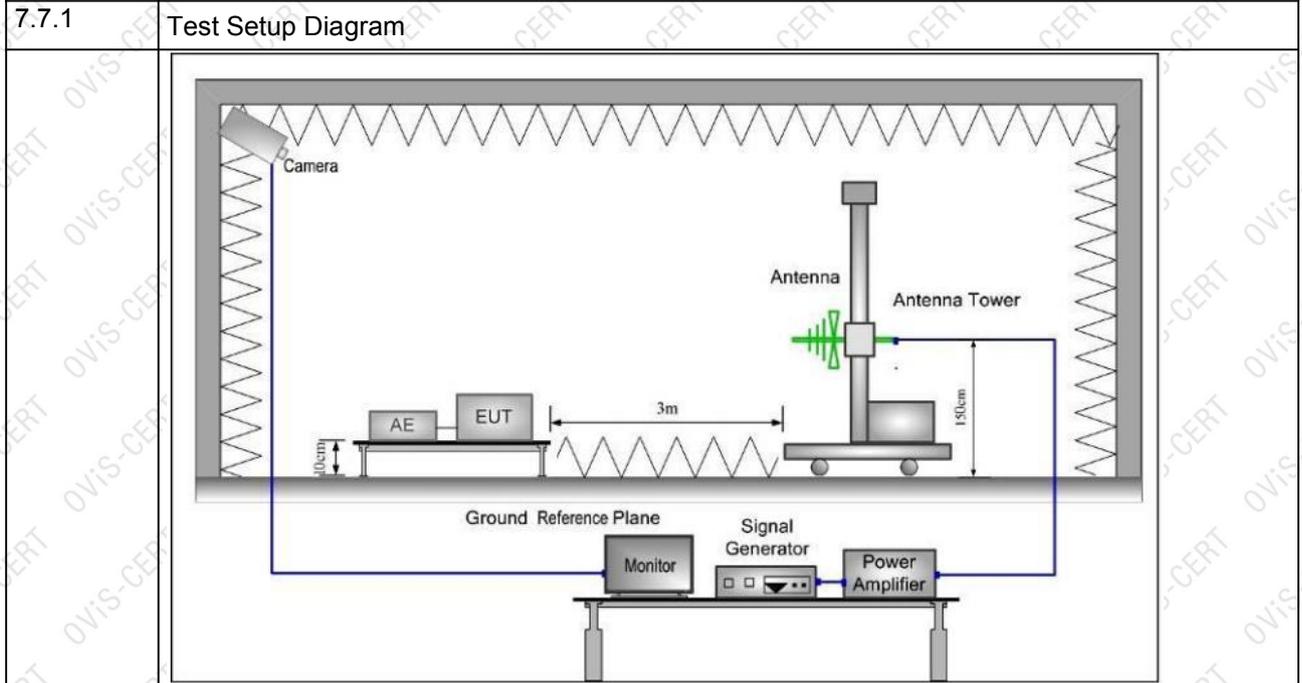



7.7.2 E.U.T. Operation

Operating Environment:
Temperature: 22°C Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
Test mode:Normal Working_keep EUT running continual .

7.7.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-1GHz	10	Front	3s	A
80MHz-1GHz	10	Back	3s	A
80MHz-1GHz	10	Left	3s	A
80MHz-1GHz	10	Right	3s	A
1GHz-3.6GHz	3	Front	3s	A
1GHz-3.6GHz	3	Back	3s	A
1GHz-3.6GHz	3	Left	3s	A
1GHz-3.6GHz	3	Right	3s	A

Results:
A: No degradation in the performance of the EUT was observed.

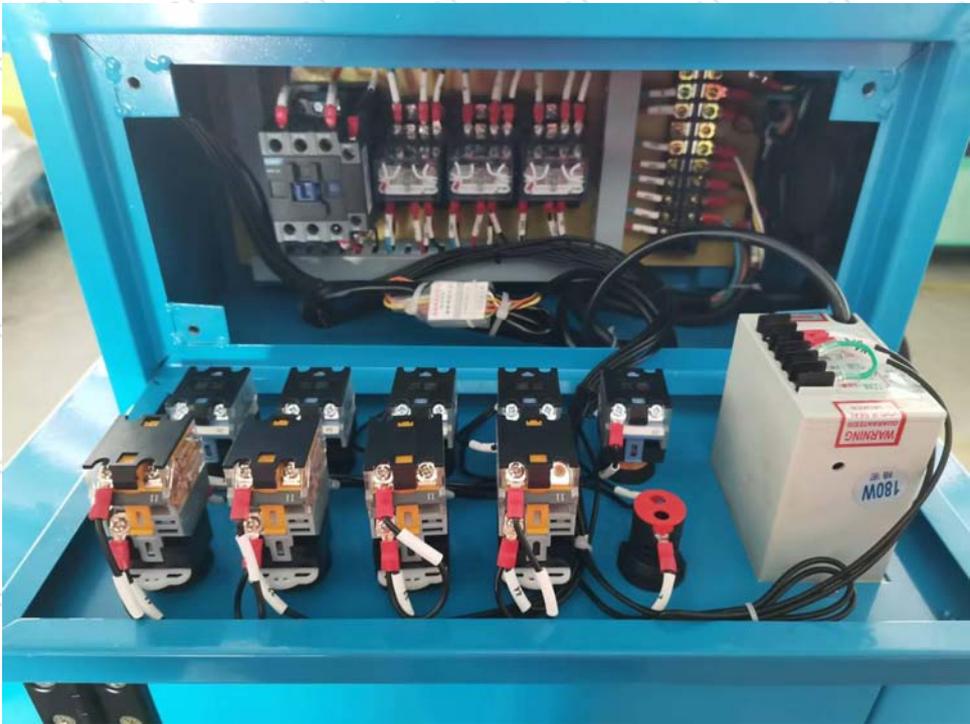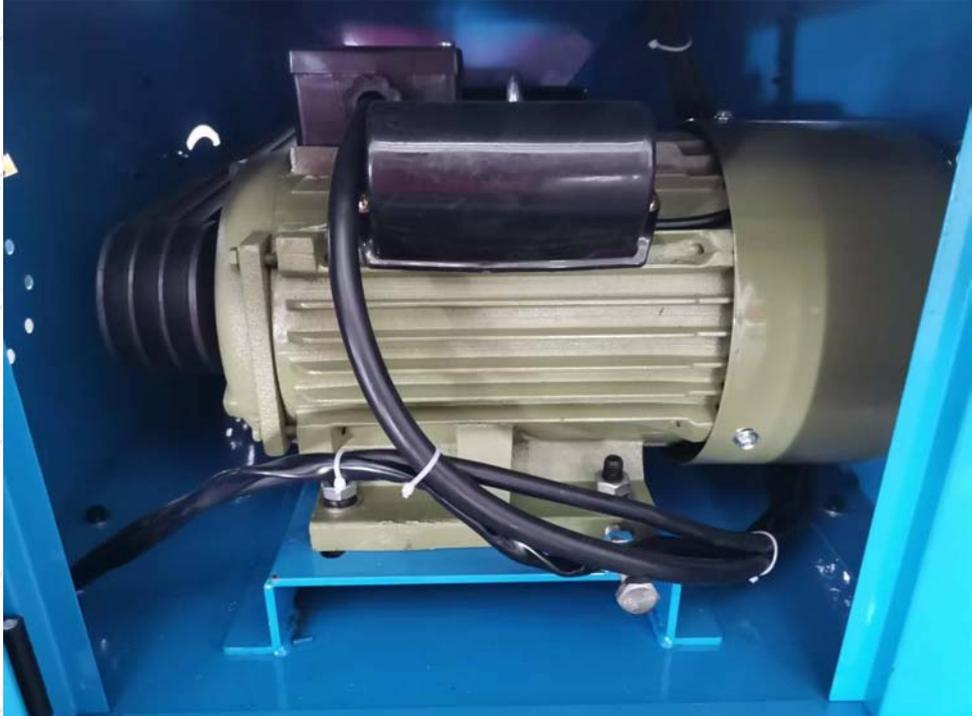8	Photographs
8.1	EUT Constructional Details (EUT Photos)
	
8.1	EUT Constructional Details (EUT Photos)
	

<p>8.1</p>	<p>EUT Constructional Details (EUT Photos)</p> 
------------	---

<p>8.1</p>	<p>EUT Constructional Details (EUT Photos)</p> 
------------	---

REMARKS

1. This report is invalid without the seal of special stamp for OViS test report and invalid if altered.
2. The copy of this report is invalid without a new seal of special stamp for OViS test report and invalid if altered.
3. This report is invalid without seals or signatures of Tester, Checker and Approval.
4. If there is no special announcement in this report, the information of producer and samples is not identified by OViS, the customer is responsible for truth of the samples.
5. Objections to the test report must be submitted to OViS within 15 days.
6. The test results shown in this report is only applicable for the samples supplied directly by the customer and accepted by the test organization, the customer shall not propagandize improperly without permission by OViS.
7. "P" means "pass", "F" means "fail", "N/A" or "—" means "not applicable" and " / " means "not test".

Address: Building 31, Feiyue Park, Xiachen Street, Jiaojiang District, Taizhou City, Zhejiang Province, China

Tel: 400-8008-959

Post Code: 318000

E-mail: info@ovis-lab.com

<http://www.ovis-lab.com>